



SCHEDA PROFILI
COMPATIBILI IKEA

1. Impiallacciato
2. Laccato
3. Pvc
4. Fenix
5. Laminato HPL

PROFILES DATA SHEET
IKEA COMPATIBLE


1. Veneered doors
2. Lacquered doors
3. Polymer doors
4. Fenix doors
5. HPL laminate doors

SLAB*

Spessori disponibili 22 mm.

Available thickness 22 mm.

Stärke 22 mm.

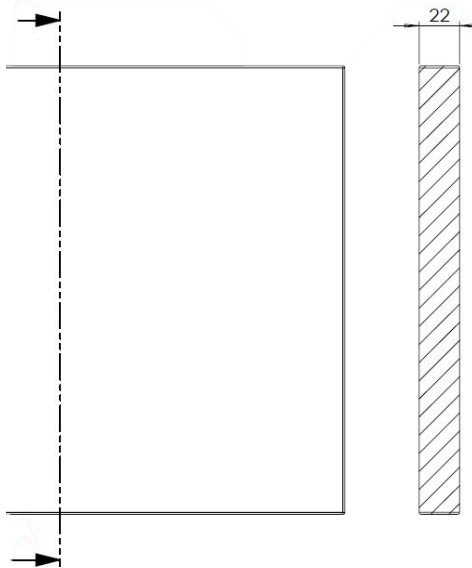

* Per le finiture lucide lo spessore aumenta di 1 mm

* For the high gloss finishes the thickness needs to be increased of 1 mm

* Für die Hochglanz Ausführungen muss die Stärke um 1 mm erhöht werden

SCHEMA PROFILI - LACCATO

PROFILES DATA SHEET - LACQUERED DOORS


SPEZIFIKATIONSBLATT FÜR PROFILN - LACKIERTE FRONTEN

SLAB

Spessori disponibili 22 mm.

Available thickness 22 mm.

Stärke 22 mm.

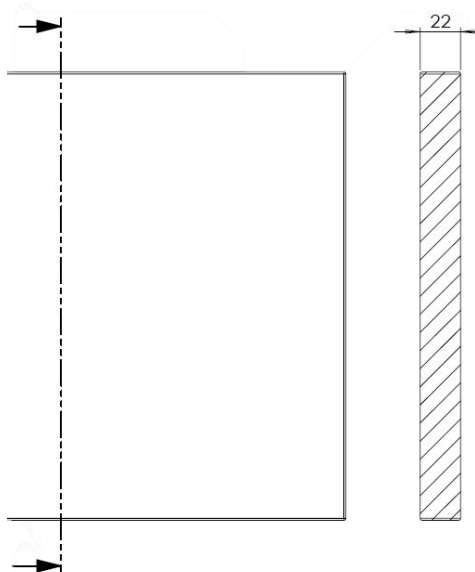


GOLA 1 / JPULL

Spessori disponibili 22 mm.

Available thickness 22 mm.


Stärke 22 mm.

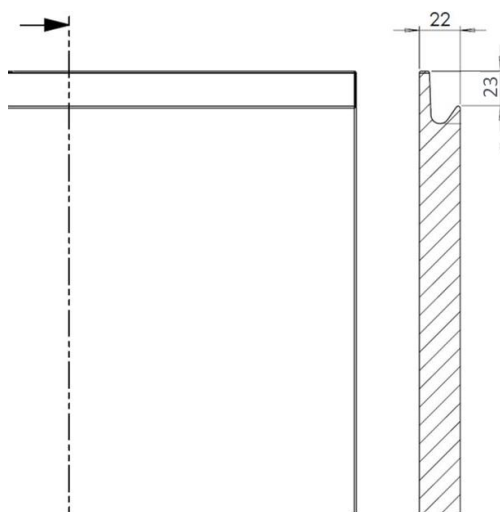

SLAB

Spessori disponibili 22 mm.
Anta a vetro con montante da
75mm. Scasso anta vetro 7 x h 12
mm.

Available thicknesses 22 mm.
Glass door with 75mm style.
Rebate for glass door 7 x h 12 mm

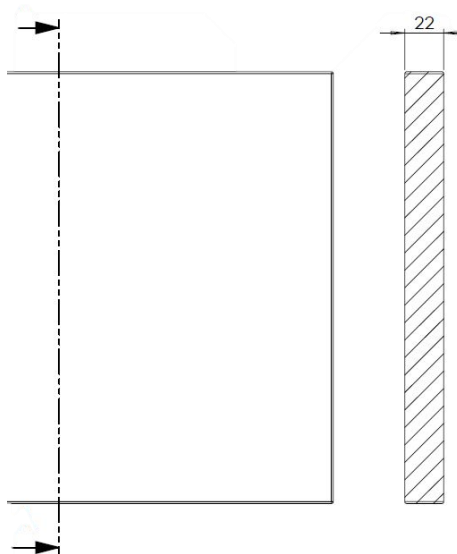


SLAB

Spessori disponibili 22 mm.

Available thickness 22 mm.

Stärke 22 mm.

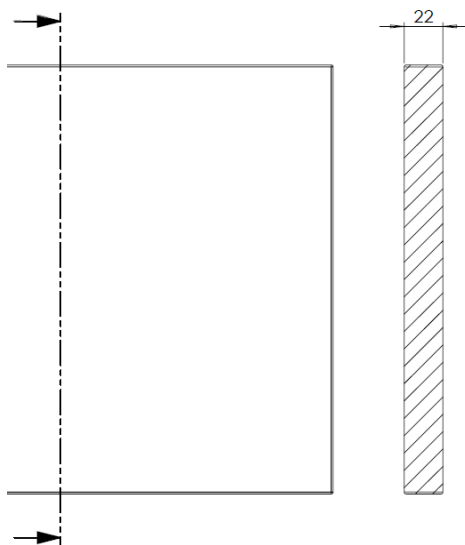

SLAB

Spessori disponibili 22 mm.

Available thickness 22 mm.

Stärke 22 mm.

