



SCHEDA PROFILI COMPATIBILI IKEA

1. Impiallacciato
2. Laccato
3. Pvc
4. Fenix
5. Laminato HPL

PROFILES DATA SHEET IKEA COMPATIBLE


1. Veneered doors
2. Lacquered doors
3. Polymer doors
4. Fenix doors
5. HPL laminate doors

SLAB

Spessori disponibili 22 mm.

Available thickness 22 mm.

Stärke 22 mm.

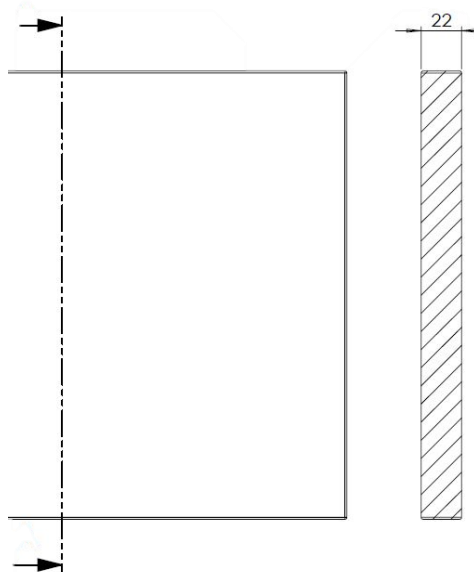


GOLA 1 / JPULL

Spessori disponibili 22 mm.

Available thickness 22 mm.

Stärke 22 mm.

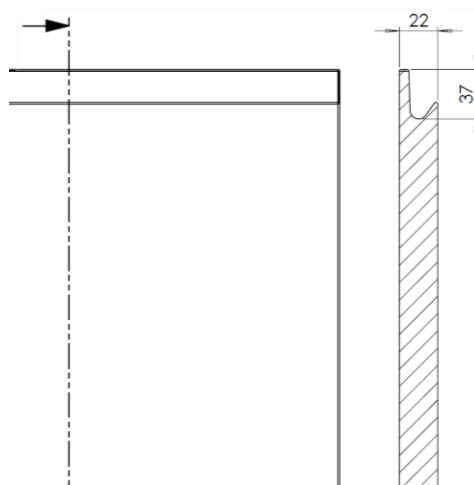


SCHEDA PROFILI - IMPIALLACCIATO
- PROFILES DATA SHEET - VENEERED DOORS
SPEZIFIKATIONSBLATT FÜR PROFILEN - FURNIERTE

SLAB*

Spessori disponibili 22 mm.

Available thickness 22 mm.

Stärke 22 mm.

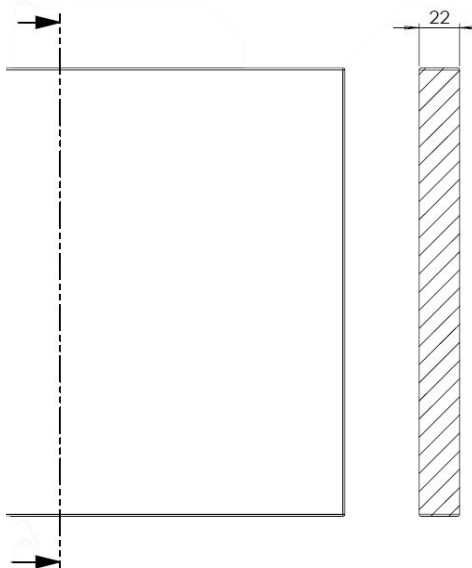

SCHEDA PROFILI
- PVC -

SLAB

Spessori disponibili 22 mm.


Anta a vetro con montante da 75mm.

Scasso anta vetro 7 x h 12 mm.

Available thicknesses 22 mm.

Glass door with 75mm style.

Rebate for glass door 7 x h 12 mm

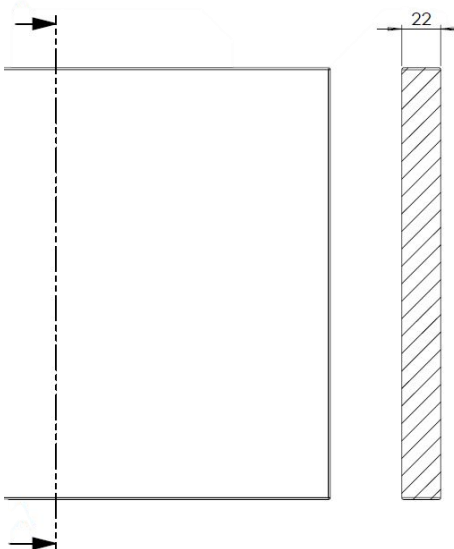


SCHEMA PROFILI - FENIX
PROFILES DATA SHEET - FENIX DOORS
SPEZIFIKATIONSBLATT FÜR PROFILEN – FENIX FRONTEN

SLAB

Spessori disponibili 22 mm.

Available thickness 22 mm.

Stärke 22 mm.

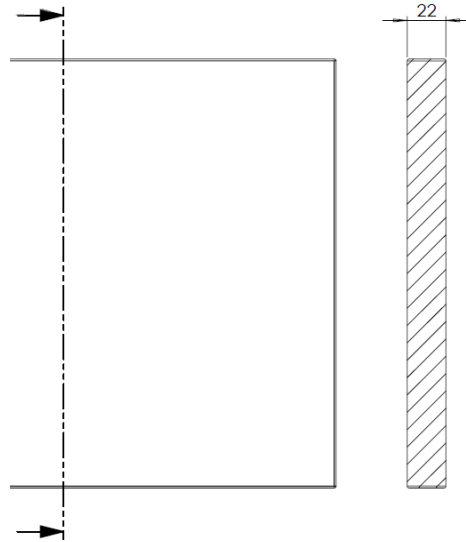

SCHEMA PROFILI - LAMINATO
- PROFILES DATA SHEET - LAMINATE DOORS
SPEZIFIKATIONSBLATT FÜR PROFILEN - LAMINAT FRONTEN

SLAB

Spessori disponibili 22 mm.

Available thickness 22 mm.

Stärke 22 mm.

